



CERTIFICATE OF TRANSLATION

As a below named translator, I hereby declare that my residence and citizenship are as stated below next to my name and I hereby certify that I am conversant with both the English and Korean languages and the document enclosed herewith is a true English translation of the Priority Document with respect to the Korean patent application No. 10-2003-0057963 filed on August 21, 2003.

NAME OF THE TRANSLATOR : Eun-Ae LEE

SIGNATURE : Eun-Ae LEE

Date : September 6, 2007

RESIDENCE : MIHWA BLDG., 110-2, MYONGRYUN-DONG 4-GA,
CHONGRO-GU, SEOUL 110-524, KOREA

CITIZENSHIP : REPUBLIC OF KOREA

**THE KOREAN INTELLECTUAL
PROPERTY OFFICE**

This is to certify that annexed hereto is a true copy from the records of the Korean Intellectual Property Office of the following application as filed.

Application Number : Korean Patent Application No. 10-2003-0057963

Date of Application : August 21, 2003

Applicant(s) : Samsung Electronics Co., Ltd.

November 1, 2003

COMMISSIONER

[ABSTRACT OF THE DISCLOSURE]**[ABSTRACT]**

Disclosed herein is a camera lens assembly for portable wireless terminals. The camera lens assembly comprises a first lens housing rotatably attached to a portable wireless terminal so that the first lens housing can be rotated about a first rotating axis extended in one direction, and a second lens housing rotatably attached to one end of the first lens housing so that the second lens housing can be rotated about a second rotating axis extended perpendicularly to the first rotating axis. The second lens housing has a camera lens mounted therein. The camera lens can be independently rotated about two rotating axes, whereby a picture-taking operation can be effectively carried out in various directions. Consequently, a picture of a subject can be conveniently taken using the camera lens assembly mounted in the portable wireless terminal.

[REPRESENTATIVE FIGURE]

Fig. 3

[INDEX]

Portable Wireless Terminals, Camera, Rotation

[SPECIFICATION]

[TITLE OF THE INVENTION]

CAMERA LENS ASSEMBLY FOR PORTABLE WIRELESS TERMINALS

[BRIEF DESCRIPTION OF THE DRAWINGS]

5 Fig. 1 is a perspective view showing a portable wireless terminal with a conventional camera lens assembly;

 Fig. 2 is an exploded perspective view of the camera lens assembly of the portable wireless terminal shown in Fig. 1;

10 Fig. 3 is an exploded perspective view showing a camera lens assembly for portable wireless terminals according to a preferred embodiment of the present invention;

 Fig. 4 is an assembled perspective view of the camera lens assembly shown in Fig. 3;

 Fig. 5 is a front view of the camera lens assembly shown in Fig. 4;

15 Fig. 6 is a side view of the camera lens assembly shown in Fig. 4;

 Fig. 7 is another front view of the camera lens assembly shown in Fig. 4;

 Fig. 8 is another side view of the camera lens assembly shown in Fig. 4; and

 Fig. 9 is a perspective view of a portable wireless terminal with the camera lens assembly shown in Fig. 3 mounted therein.

20

[DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT]

[OBJECT OF THE INVENTION]

[RELATED FIELD AND PRIOR ART OF THE INVENTION]

25 The present invention relates to a portable wireless terminal, and more particularly to a camera lens assembly for portable wireless terminals.

 Portable wireless terminals with various functions and shapes have been proposed as the information communication industry is developed. On the basis of
30 their forms, the portable terminals may be classified into a bar-type terminal, a flip-type terminal having a flip cover, and a folder-type terminal having a folder part rotatably

attached to the main body of the terminal in the range of prescribed angles.

Such portable terminals have various functions, such as transmitting/receiving e-mails or data, playing Internet games, or transmitting text messages, in addition to a basic function, i.e., an audio communication function. Also, service ranges of the portable terminals, such as image communication between users of the portable terminals or a motion picture service, have been increasingly expanded recently as the portable terminals adopt new communication technologies, such as CDMA 1x EVDO. As a mobile communication service area is increased, the portable wireless terminal is further provided with various functional units, such as a camera lens. Especially, the camera lens occupies a position as one of the indispensable components of the portable wireless terminal as the image communication or the motion picture service using the portable wireless terminal is expanded.

Fig. 1 is a perspective view showing a portable wireless terminal 100 with a conventional camera lens assembly 200. As shown in Fig. 1, the conventional camera lens assembly 200 is mounted in one of side hinged arms 115 of the portable wireless terminal 100. The portable wireless terminal 100 comprises a main body 101 and a folder part 102 rotatably attached to the main body 101.

On the front surface of the main body 101 are arranged a keypad 111 comprising a plurality of key buttons, and a microphone unit 113, which is disposed at one side of the keypad 111. At the upper right end of the main body 101 is attached an antenna unit 119.

The folder part 102 comprises a display unit 121 arranged on the inner surface thereof, which is opposite to the main body 101, and a speaker unit 123 disposed at one side of the display unit 121.

The main body 101 is provided at the upper end thereof with a pair of side hinged arms 115, which are opposite to each other while being spaced apart from each other. At one end of the folder part 102 is formed a center hinged arm 125, which is rotatably disposed between the side hinged arms 115. Consequently, the folder part 102 is rotatably attached to the main body 101. The camera lens assembly 200 is

rotatably mounted in one of the side hinged arms 115 of the main body 101.

Fig. 2 is an exploded perspective view of the camera lens assembly 200 of the portable wireless terminal 100 shown in Fig. 1. As shown in Fig. 2, the camera lens assembly 200 comprises a lens housing 201, a front cover 202, a lens unit 203, a rear cover 204, and a camera shaft 205. As described above, the camera lens assembly is
5 rotatably mounted in one of the side hinged arms 115 of the main body 101.

The lens housing 201 is formed in the shape of a cylinder having open ends. Inside the lens housing 201 may be mounted ribs (not shown) for supporting a camera lens. The front cover 202 is attached to one end of the lens housing 201. One end of
10 the camera lens 231 is fixed to the inside of the front cover 202. The front cover 202 has an exposure opening 221 for exposing the camera lens 231. The exposure opening 221 is closed by means of a window 229 made of a transparent material. The rear cover 204 is fixed to the other end of the lens housing 201 by means of a fixing member, such as a screw 269. From one side of the rear cover 204 is extended a coupling shaft
15 having a grooved coupling part 249 formed at the end thereof. The rear cover 204 serves to close the other end of the lens housing 201. Also, the rear cover 204 provides a passage through which a flexible printed circuit 233 extended from one end of the camera lens 231 passes. The camera shaft 205 has a through-hole 251, through which the coupling shaft of the rear cover 204 is inserted. Consequently, the end of
20 the rear cover 204, where the grooved coupling part 249 is formed, is protruded toward the end of the camera shaft 205. The end of the rear cover 204 is inserted through a diaphragm (not shown) disposed in one of the side hinged arms 115 so that an E-ring 263 is fitted on the grooved coupling part 249 of the rear cover 204. In this way, the camera lens assembly 200 is rotatably mounted in one of the side hinged arms 115.

25 Between the rear cover 204 and the camera shaft 205 is disposed a spring washer 261, which serves to tightly push the camera shaft 205 to the diaphragm in the side hinged arm 115. Consequently, the camera lens assembly 200 is rotated while the E-ring 263 and the end of the camera shaft 205 are tightly pushed to both sides of the diaphragm, respectively, so that the camera lens assembly 200 is stably rotatable.

30 The camera lens assembly 200 of the portable terminal 100 with the

above-stated construction is rotated about a rotating axis A extended in the lateral direction of the main body 101. As a result, it is possible to take pictures using the camera lens assembly 200 while it is turned toward the front or the rear of the main body 101.

5 In the conventional camera lens assembly, however, the lens housing can be rotated about only one rotating axis, and picture-taking angles are limited within the rotation track of the lens housing. Consequently, the conventional camera lens assembly has a problem that a picture-taking operation in the lateral direction is difficult and inconvenient although the picture-taking operation in the forward and
10 backward direction is easy.

[SUBSTANTIAL MATTER OF THE INVENTION]

15 Therefore, the present invention has been made in view of the above problem, and it is an object of the present invention to provide a camera lens assembly for portable wireless terminals comprising lens housings rotatable about two rotating axes, respectively, whereby a picture-taking operation can be effectively carried out in various directions.

20 In accordance with one aspect of the present invention, the above and other objects can be accomplished by the provision of a camera lens assembly mounted in a portable wireless terminal, comprising: a first lens housing rotatably attached to the terminal so that the first lens housing can be rotated about a first rotating axis extended in one direction; and a second lens housing rotatably attached to one end of the first lens housing so that the second lens housing can be rotated about a second rotating axis
25 extended perpendicularly to the first rotating axis, the second lens housing having a camera lens mounted therein.

[CONSTRUCTION AND OPERATION OF THE INVENTION]

30 Now, a preferred embodiment of the present invention will be described in detail with reference to the accompanying drawings. In the following, a detailed

description of known functions and configurations incorporated herein will be omitted when it may make the subject matter of the present invention rather unclear.

Referring to Figs. 3 to 8, a camera lens assembly 300 for portable wireless terminals, such as a portable wireless terminal 400 shown in Fig. 9, according to a preferred embodiment of the present invention comprises a first lens housing 301, a
5 second lens housing 302, a camera lens unit 303, a rear cover 304, and a camera shaft 305.

The first lens housing 301 is formed in the shape of a cylinder with both ends opened, which has a receiving space 311 defined therein. The first lens housing 301 is
10 provided at one end thereof with a first semicircular opening 313 and a pair of supporting pieces 315. The supporting pieces 315 are extended from the end of the first lens housing 301 in the longitudinal direction of the first lens housing 301, respectively. The supporting pieces 315 are opposite to each other while they are spaced apart from the first semicircular opening 313 by a prescribed distance. On the
15 opposite surfaces of the supporting pieces 315 are formed a supporting hole (not shown), respectively. The first lens housing 301 is rotatably mounted in a main body 401 of the terminal 400 through the rear cover 304 and the camera shaft 305 so that the first lens housing 301 can be rotated about a first rotating axis A1 extended in the longitudinal direction of the first lens housing 301.

From one side of the rear cover 304 is extended a coupling shaft having a
20 grooved coupling part 349 formed at the end thereof. The rear cover 304 is fixed to the other end of the first lens housing 301 by means of a fixing member, such as a screw 369, for closing the other end of the first lens housing 301. Also, the rear cover 304 provides a passage through which a flexible printed circuit 333 extended from one
25 end of the camera lens 331 passes. The camera shaft 305 has a through-hole 351, through which the coupling shaft of the rear cover 304 is inserted. Consequently, the end of the rear cover 304, where the grooved coupling part 349 is formed, is protruded toward the end of the camera shaft 305. The end of the rear cover 304 is inserted through a diaphragm (not shown) disposed in one of the side hinged arms 415 of the
30 main body 401 so that an E-ring 363 is fitted on the grooved coupling part 349 of the rear cover 304. In this way, the camera lens assembly 300 is rotatably mounted in one

of the side hinged arms 415.

Between the rear cover 304 and the camera shaft 305 is disposed a spring washer 361, which serves to tightly push the camera shaft 305 to the diaphragm in the side hinged arm 415. Consequently, the camera lens assembly 300 is rotated while the
5 E-ring 363 and the end of the camera shaft 305 are tightly pushed to both sides of the diaphragm, respectively, so that the camera lens assembly 300 is stably rotatable.

The rear cover may be formed integrally with the camera shaft 305. In this case, the spring washer 361 may be disposed adjacent to the grooved coupling part 349 so that the spring washer 361 can be placed against the diaphragm in the side hinged
10 arm 415.

The second lens housing 302 is rotatably attached to one end of the first lens housing 301 so that the second lens housing 302 can be rotated about a second rotating axis A2, which is extended perpendicularly to the first rotating axis A1. The second lens housing 302 comprises a first hemispheric case 302a opposite to the first lens
15 housing 301, and a second hemispheric case 302b attached to the first hemispheric case 302a. Consequently, the first and second hemispheric cases 302a and 302b together constitute the second lens housing, which is formed in the shape of a sphere. The first and second hemispheric cases 302a and 302b have a receiving space 323 defined by ribs formed therein. In the receiving space 323 is disposed a camera lens 331 of the
20 camera lens unit 303. The second lens housing, which comprises the first and second hemispheric cases 302a and 302b, is provided at a prescribed position of the outer circumference thereof with a second opening 321a for exposing the camera lens 331. Preferably, the second opening 321a is closed by a window 321b made of a transparent material. As the second lens housing 302 is rotated, the second opening 321a can be
25 placed above the first opening 313 of the first lens housing 301. Specifically, the second opening 321b comprises a semicircular opening part formed at the first hemispheric case 302a and another semicircular opening part formed at the second hemispheric case 302b. Also, the second lens housing 302 is provided at the outer circumferential surface thereof with a pair of pinholes 325, which are opposite to each
30 other. As in the second opening 321a, each pinhole 325 may comprise pinhole parts formed at the first and second hemispheric cases 302a and 302b, respectively:

Through the pinholes 325 are inserted supporting pins 329, respectively. The one end of each of the supporting pins 329 is protruded out of the second lens housing 302. Preferably, the supporting pins 329 are rotatably inserted through the corresponding pinholes 325. Alternatively, the supporting pins 329 may be formed integrally at the
5 outer circumferential surface of the second lens housing 302. The supporting pins 329 are rotatably inserted into the supporting holes formed at the supporting pieces 315 of the first lens housing 301, respectively. Consequently, the second lens housing 302 can be rotated about the second rotating axis A2.

On the outer circumferential surface of the second lens housing 302 may be
10 formed a protrusion for restricting the rotation range of the second lens housing 302. For example, on the outer circumferential surface of the second hemispheric case 302b is formed a stopper protrusion 327, which is extended along the line connecting two pinholes 325. When the second lens housing 302 is rotated, the stopper protrusion 327 is engaged with the end of the first lens housing 301 for restricting the rotation
15 range of the second lens housing 302. As another example of means for restricting the rotation range of the second lens housing 302, there may be provided a guide rib (not shown) protruded along the edge of the second opening 321a. The guide rib may serve to securely attach the window 321b to the second housing 302 at the second opening 321a. When the second opening 321a is placed above the first opening 313,
20 the guide rib is engaged with the sidewall of the first opening 313 for restricting the rotation range of the second lens housing 302.

Although it is not shown in the drawings, the first hemispheric case 302a of the second lens housing 302 preferably has a through-hole through which the flexible printed circuit 333 of the camera lens unit 303 passes. The flexible printed circuit 333
25 passes through the through-hole and the first lens housing 301 and are drawn out from the other end of the first lens housing 301. Since the rotation range of the second lens housing 302 is restricted by means of the stopper protrusion 327, the through-hole formed at the first hemispheric case 302a of the second lens housing 302 is preferably placed in the first lens housing 301. It can be seen from Figs. 5 to 8 that the rotation
30 range of the second lens housing 302 is limited to an angle of 90 degrees by means of the stopper protrusion 327. In other words, when the second lens housing 302 is rotated by an angle of 90 degrees about the second rotating axis A2 under the condition

that the second opening 321a is placed above the first opening 313, the stopper protrusion 327 is engaged with the end of the first lens housing 301, by which the second lens housing is no longer rotated. Also, since the guide rib is formed along the edge of the second opening 321a as described above, the movement of the second opening 321a to the inside of the first lens housing 301 can be restricted.

Fig. 9 is a perspective view showing a portable wireless terminal 400 with the camera lens assembly 300 mounted therein. As shown in Fig. 9, the camera lens assembly 300 is rotatably mounted in the main body 401 of the portable wireless terminal 400. More specifically, the camera lens assembly 300 is mounted in one of the side hinged arms 415 of the main body 401 of the portable wireless terminal 400.

On the front surface of the main body 401 are arranged a keypad 411 comprising a plurality of key buttons, and a microphone unit 413, which is disposed at one side of the keypad 411. At the upper right end of the main body 401 is attached an antenna unit 419. The side hinged arms 415 are formed at the upper end of the main body 401 in a pair, which are opposite to each other while being spaced apart from each other.

A folder part 402 of the portable wireless terminal 400 comprises a display unit 421 arranged on the surface thereof, which is opposite to the main body 401, and a speaker unit 423 disposed at one side of the display unit 421. At one end of the folder part 402 is formed a center hinged arm 425, which is rotatably disposed between the side hinged arms 415.

The camera lens assembly 300 is attached to one end of one of the side hinged arms 415. As the first lens housing 301 is rotated about the first rotating axis A1, the second opening 321a is turned toward the front or the rear of the terminal 400 so that a picture of a subject can be taken in the front or at the rear of the terminal 400. As the second lens housing 302 is rotated about the second rotating axis A2, the second opening 321a is turned in the lateral direction of the terminals 400 so that a picture of a subject can be taken in the lateral direction of the terminal 400. The second lens housing 302 can be independently rotated irrespective of the rotation of the first lens housing 301. Consequently, it is possible to individually adjust rotation angles of the first and second lens housing 301 and 302 so that a picture-taking operation can be

carried out in the oblique direction as well as the aforesaid forward, backward, and lateral directions.

Although the preferred embodiment of the present invention has been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

5

[EFFECTS OF THE INVENTION]

As apparent from the above description, the present invention provides a camera lens assembly for portable wireless terminals wherein a camera lens can be independently rotated about two rotating axes, whereby a picture-taking operation can be effectively carried out in various directions. Consequently, a picture of a subject can be conveniently taken using the camera lens assembly mounted in the portable wireless terminal.

10

15

[PATENT CLAIMS]

1. A camera lens assembly mounted in a portable wireless terminal, comprising:
a first lens housing rotatably attached to the terminal so that the first lens
5 housing can be rotated about a first rotating axis extended in one direction; and
a second lens housing rotatably attached to one end of the first lens housing so
that the second lens housing can be rotated about a second rotating axis extended
perpendicularly to the first rotating axis, the second lens housing having a camera lens
mounted therein.

10 2. The assembly as set forth in claim 1, wherein the first lens housing is formed
in the shape of a cylinder with an open end for allowing the second lens housing to be
attached to the first lens housing, and wherein the first lens housing has a first
semicircular opening formed at a prescribed position of the outer circumference thereof
15 adjacent to the open end, and a pair of supporting pieces extended from the open end in
the longitudinal direction thereof while the supporting pieces are opposite to each other.

3. The assembly as set forth in claim 2, wherein the second lens housing is
formed in the shape of a sphere and attached to the open end of the first lens housing;
wherein the second lens housing has a pair of supporting pins protruded outwardly from
prescribed positions of the outer circumference thereof in the opposite directions,
20 respectively, so that the supporting pins are rotatably coupled with the supporting
pieces, respectively, and a second opening formed at a prescribed position of the outer
circumference thereof while being spaced apart from the supporting pins for exposing
the camera lens.

4. The assembly as set forth in claim 3, wherein the second opening is placed
25 above the first opening as the second lens housing is rotated.

5. The assembly as set forth in claim 3, wherein the second lens housing further
has a stopper protrusion formed on the outer circumferential surface thereof, and
wherein the stopper protrusion is engaged with the open end of the first lens housing
when the second lens housing is rotated so that the rotation range of the second lens
30 housing is restricted.

6. The assembly as set forth in claim 5, wherein the rotation range of the second lens housing is limited to an angle of 90 degrees.

5 7. The assembly as set forth in claim 1, wherein the second lens housing further has a through-hole formed at the outer circumference thereof, the through-hole being placed in the first lens housing, and wherein the camera lens has a flexible printed circuit extended from one end thereof, the flexible printed circuit passing through the through-hole and the first lens housing and then being drawn out from the other end of the first lens housing.

10 8. The assembly as set forth in claim 1, further comprising a camera shaft fixed to the other end of the first lens housing and extended in the first rotating axis so that the camera lens is rotatably attached to the terminal.

9. The assembly as set forth in claim 8, wherein the camera shaft has a grooved coupling part formed on the outer circumference of the end thereof in the circumferential direction so that an E-ring is fitted on the grooved coupling part.

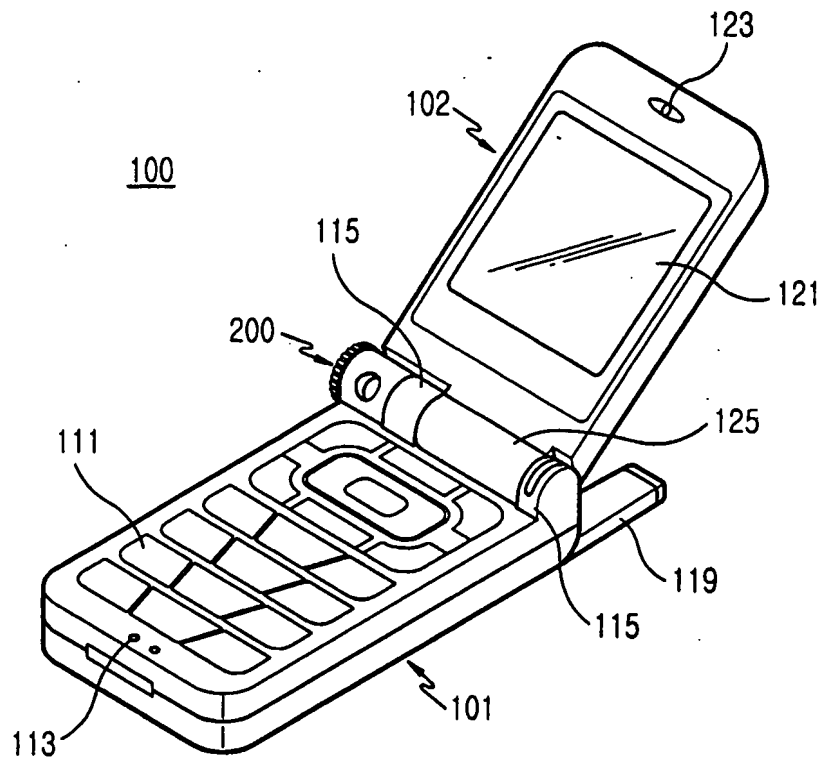


FIG.1

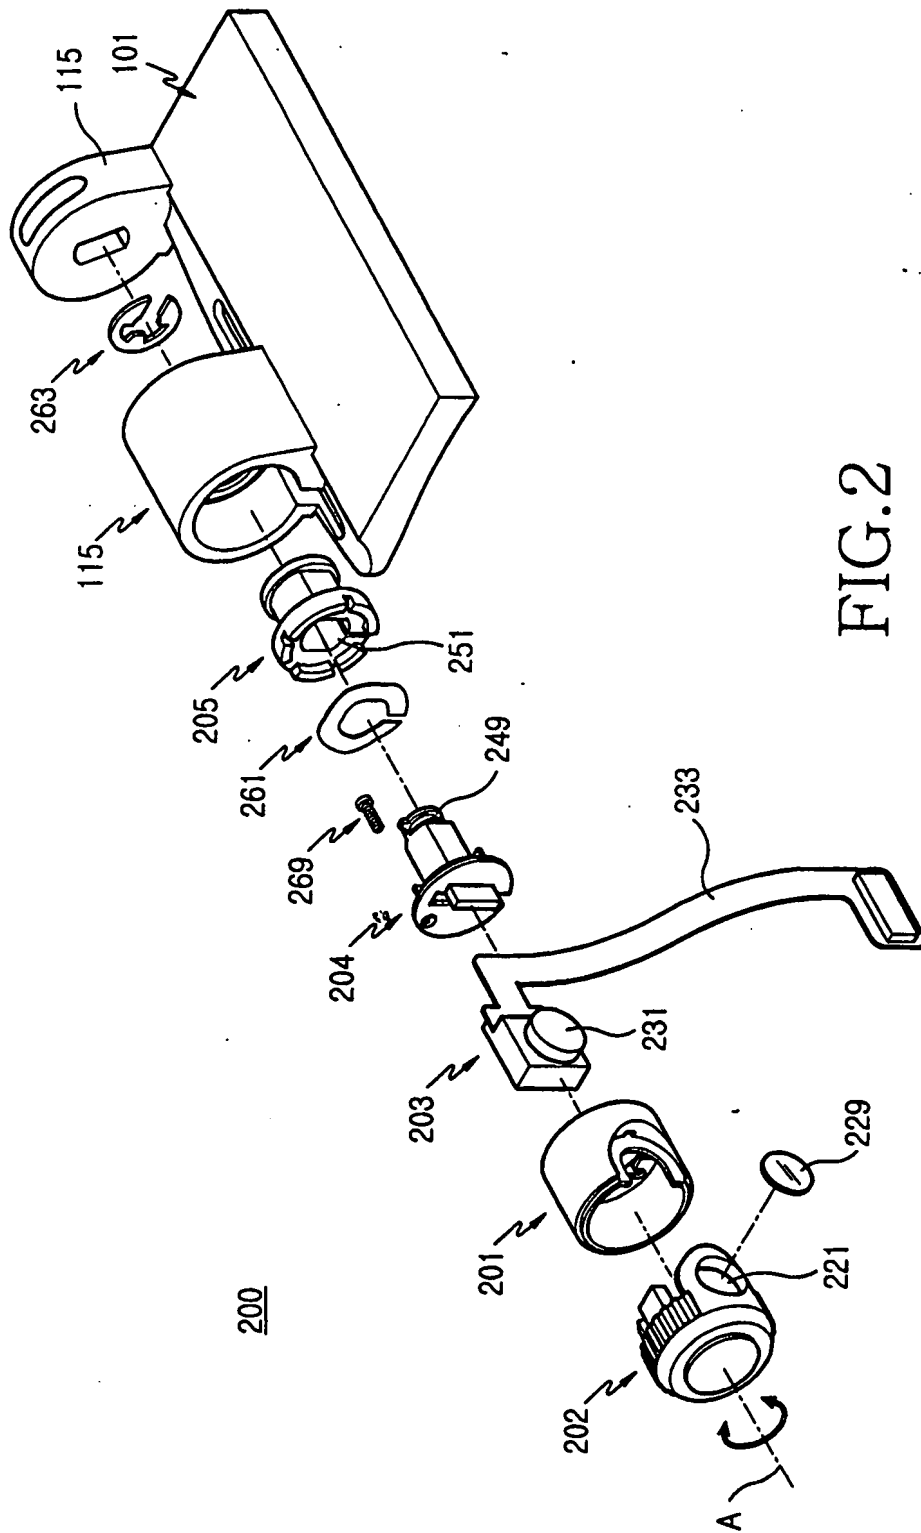


FIG. 2

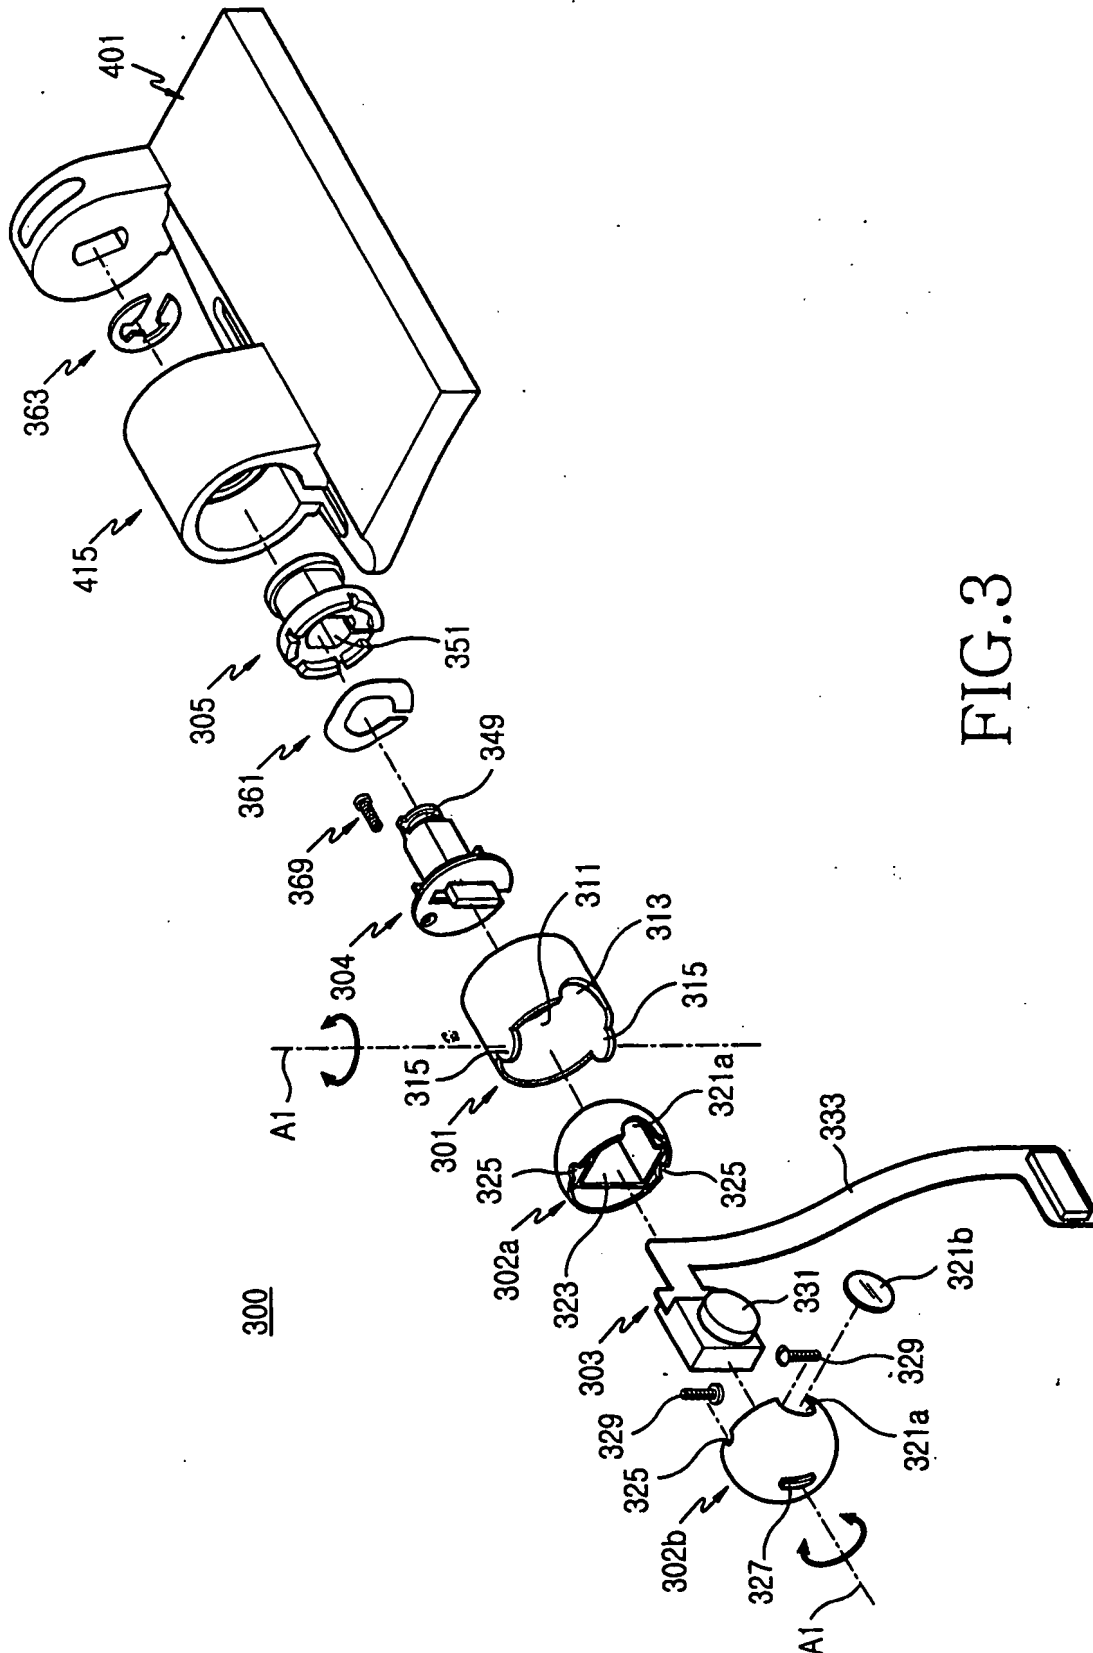


FIG. 3

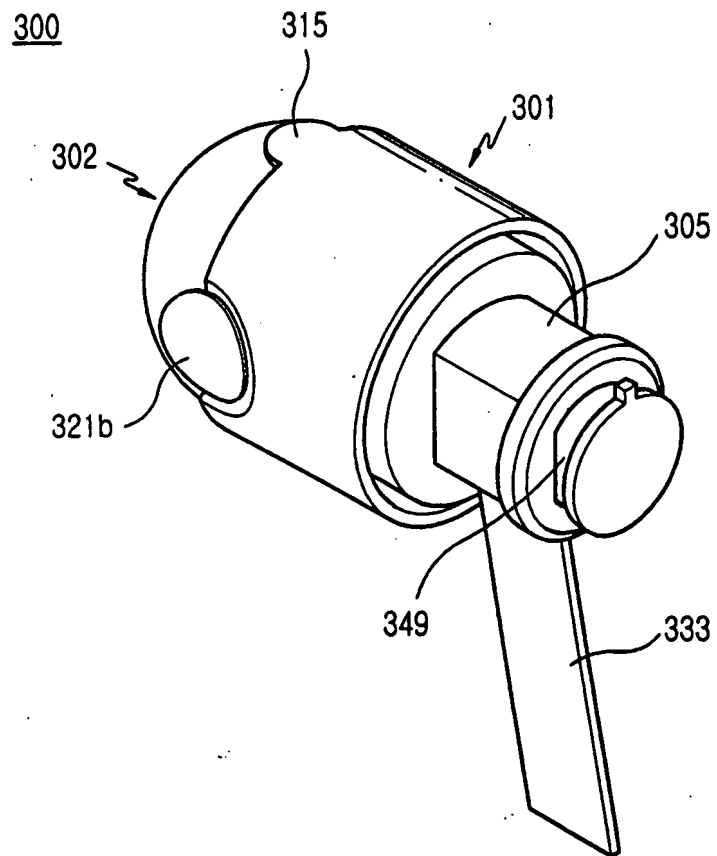


FIG. 4

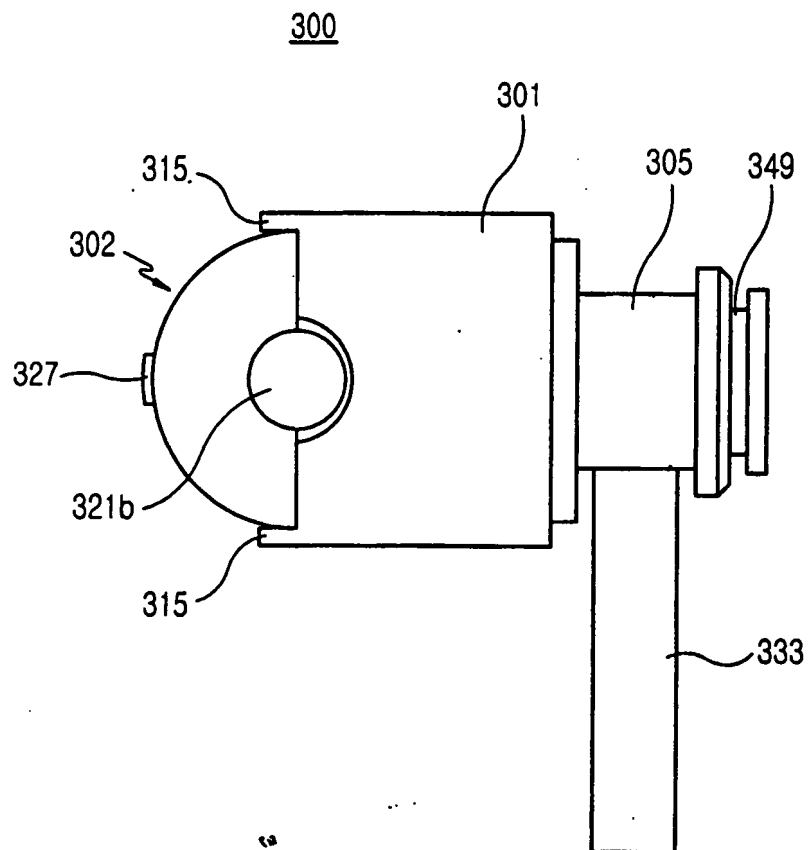


FIG.5

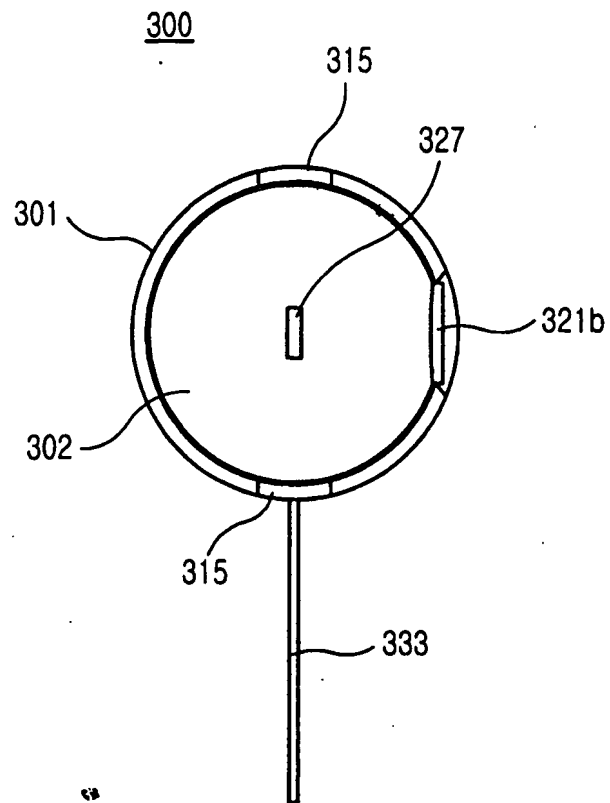


FIG. 6

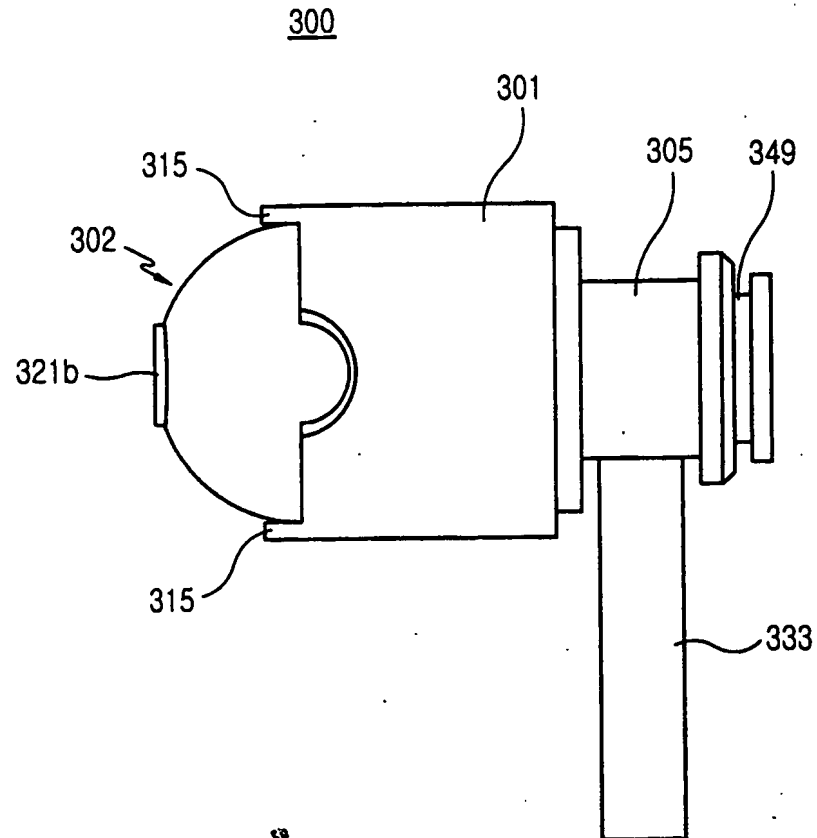


FIG.7

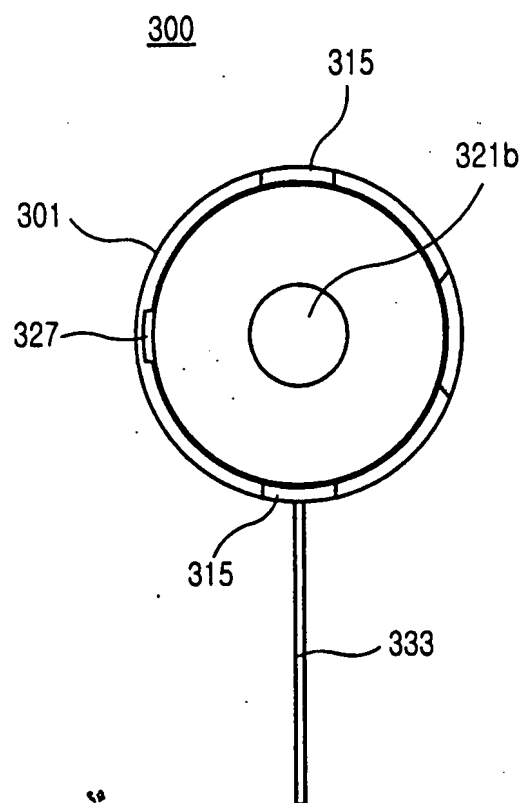


FIG. 8

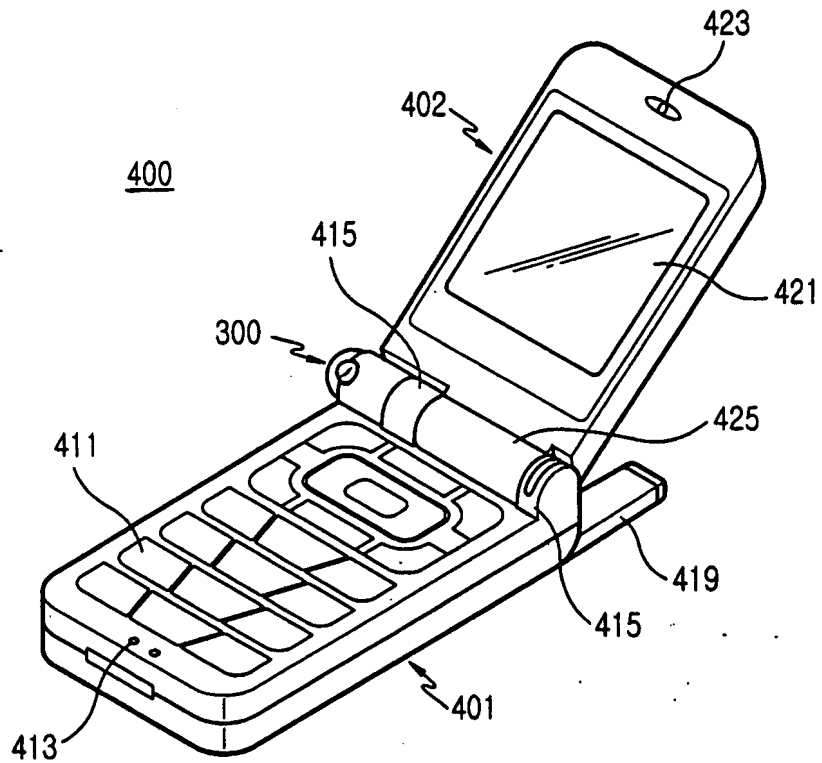


FIG. 9